



DURWOOD



DOORWOOD

**The perfect floor
for your project**



Real wood

Feel real wood. Each DURWOOD floor is finished with a top layer of authentic wood species. Just like a solid wood floor, no two boards are the same. Oak, teak or other species give that beautiful natural look you are aiming for. The warmth of wood can never be found in fake.

A sustainable choice

Wood is precious. We use it sparingly: we only use a thin layer of wood for the top finish. We source our trees from sustainable managed forests and every board is 100% recyclable, participating as such in the circular economy. We can even offer FSC certified floors on demand. We source energy from solar and wind production, the sawdust and wood waste from our production facility is used to heat the floor space. The future is a CO2 neutral world.

Waterproof surface

The DURWOOD board has a waterproof surface. The combination with the Aqua Sealing Complete system, which protects the bevels, gives you a 12-hour waterproof floor. This makes your floor bullet proof for daily spills and drops.

High-strength and scratch resistant


Scratch resistant DURWOOD floors are ultra-high-strength. Our new Titanium finish has eight robust layers of lacquer. This makes your floor resistant to daily wear and tear as well as scratches, and ready for intensive use (usage class 33).

High-strength

Our Titanium finished wood in combination with a core out of high-density fiber board (HDF) or malty layer paly wood, makes your floor stronger and more dimensionally stable than any traditional solid or engineered wooden floor. Use DURWOOD with peace of mind in the toughest places of your house such as your kitchen or high traffic areas in commercial use such as hotel lobbies, offices, retail stores...



DurWood Flooring Structure

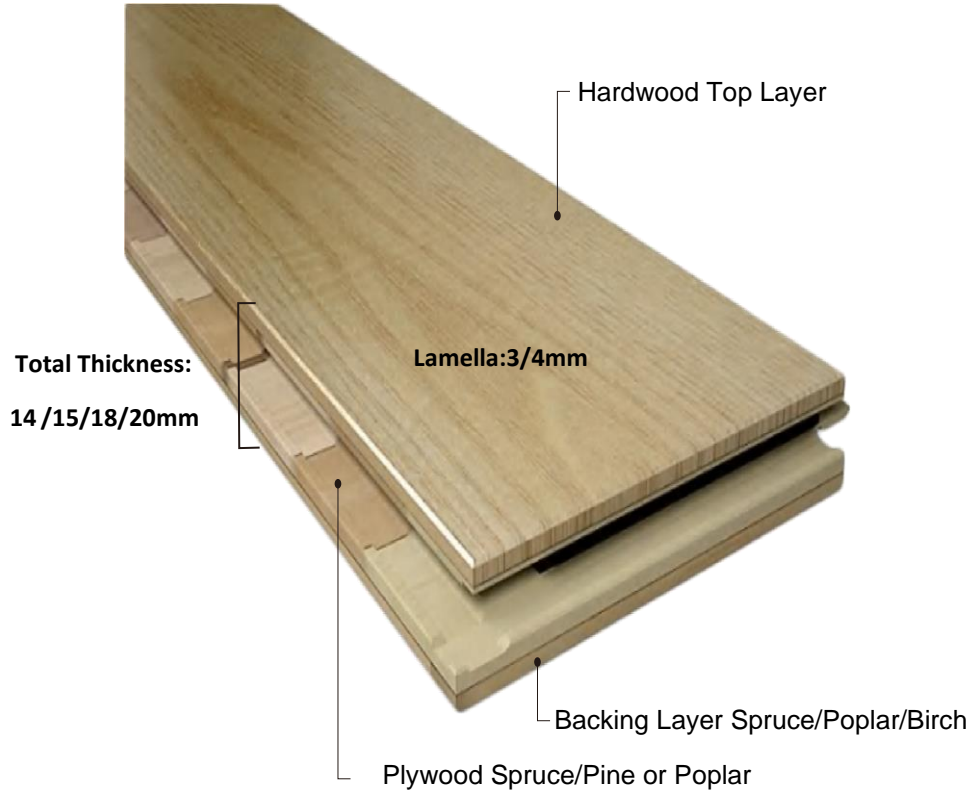


3 Layer



Multilayer/2-Layer




DurWood Flooring Structure

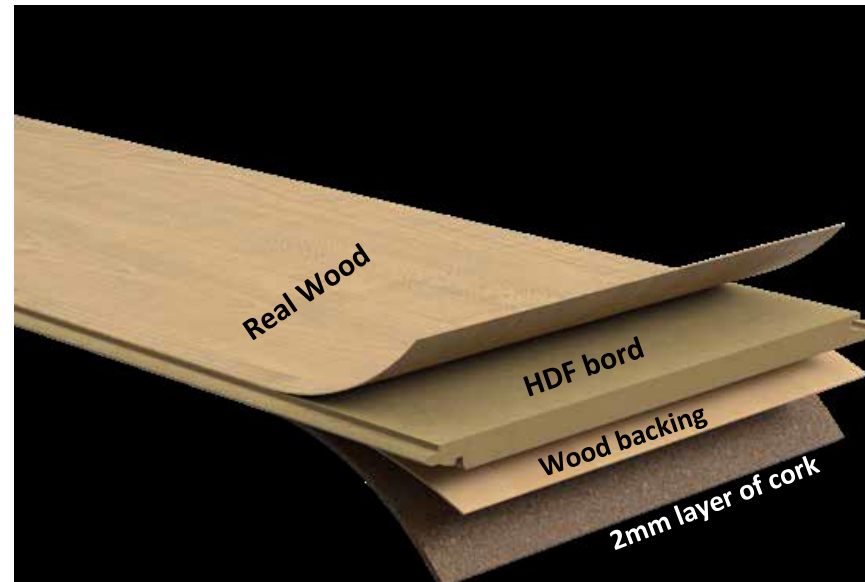






Durwood Herringbone Flooring

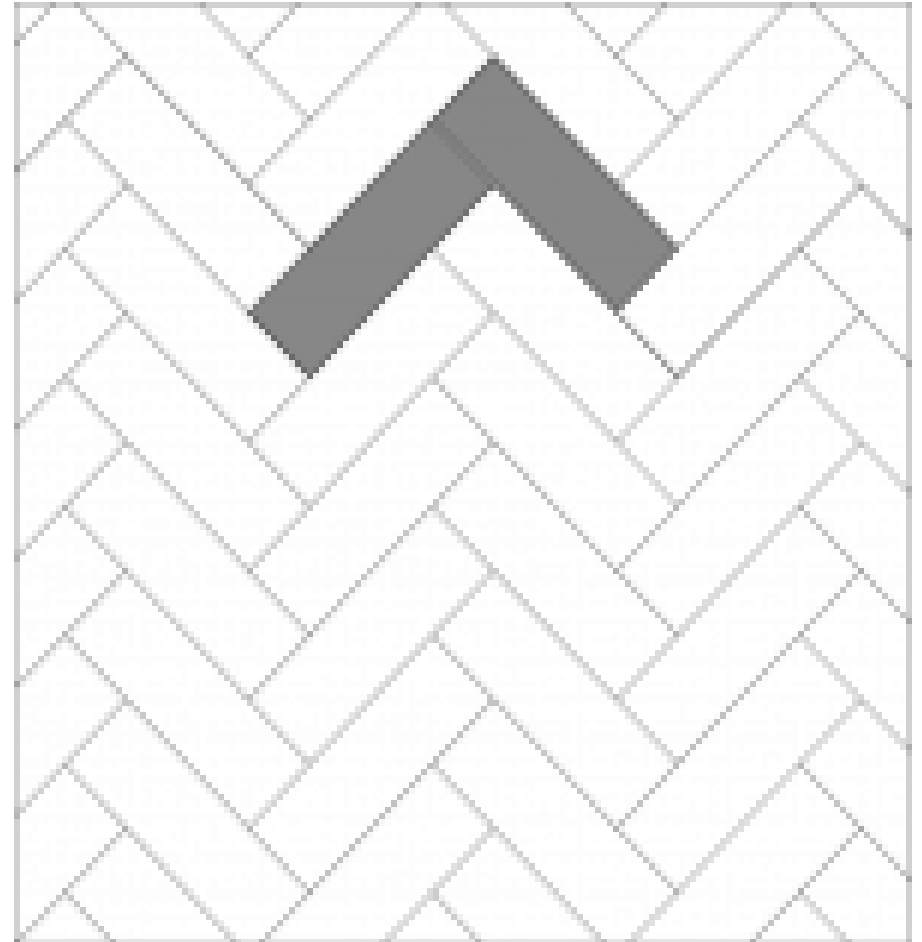



Durwood Parquet Floor Panels

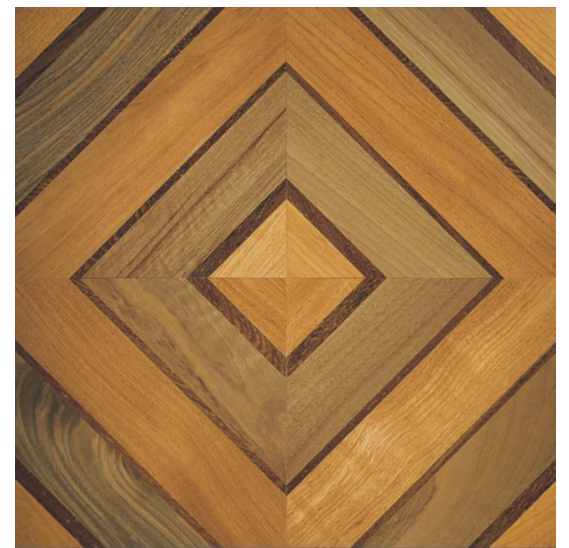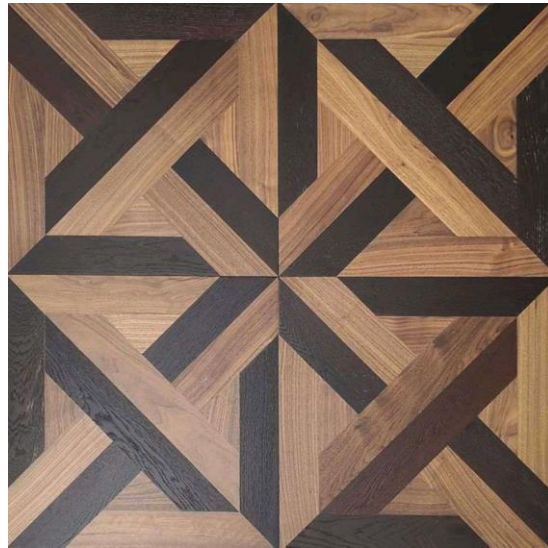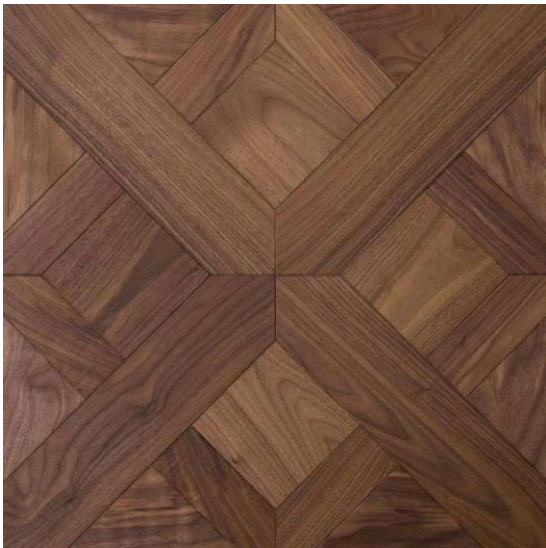



DurWood Flooring Size



600*70mm



600*90mm



900*90mm



910*120mm



1200*120mm



1210*190mm



1220*126mm



1900*150/165mm



1800/1900*189/190mm



2200*220/240*260mm



3000*300mm



Surface Treatment

Grade AB

Few live knots, dead knots

Natural color difference, with signs
of age knot size between <15mm



Grade ABC

No knots or a small amount of live knots
<25mm slight color
difference, clean and surface






Surface Treatment

Brushe

Brushed Oak flooring is created by using wire brushes to pull out the softer spring wood, exposing the harder summer wood, resulting in a beautifully textured and durable surface which enhances the aesthetic of any project

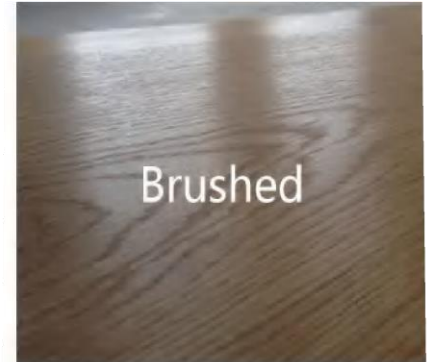


Flame

Flamed appearance, characterised by brown lines at the heart of the trunk, produces wood floor planks with very contrasting shades.



Smoke

It consists of exposing the wood to fumes from a strong aqueous solution of ammonium hydroxide which reacts with the tannins in the wood. The process works best on white oak because of the high tannin content of this wood. Fumed oak is also called smoked oak.

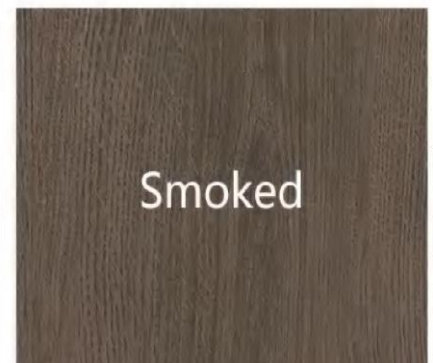




Surface Treatment


Chemical

Chemical reaction is to produce chemical changes, usually the wood containing acidic substances to do chemical change process, with inorganic salts of chemical materials rubbed or rolled on the wooden floor, through the inorganic salts and the wood itself contains tannic acid chemical reaction and change color, its change out of the color is very natural, with the original wood texture, very high-end, and conventional dye coloring is very different.

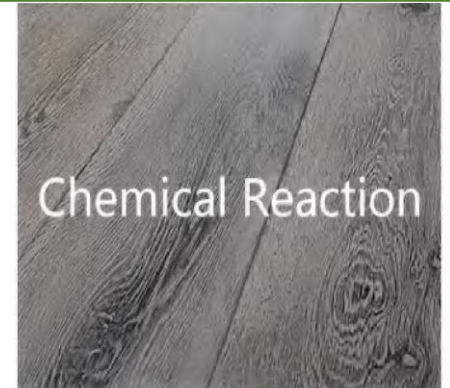

Handscraped

Small marks, scratches, and dents hide easily within the varied scrapes, making normal wear and tear much less stressful. While smooth floors may show dents and scratches. Your hand-scraped hardwood will look just as good year after, with small markings blending in and enhancing the original finish.

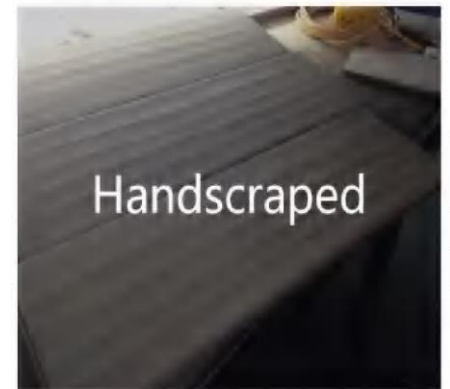

Whitewashe

Whitewash is a semi-opaque finish applied to an existing finish or bare wood with the goal of allowing the base coat or wood grain to show through. Whitewashing can be done to almost any surface, including brick, and is often applied to vintage furniture, such as chairs and tables, to modernise and brighten the space.





Surface Treatment

Distressed

A distressed floor is made from new unfinished flooring that is treated or textured to achieve the appearance of a floor that has been worn down by age and foot traffic.




Sawn Mark

Also known as Sawn Mark, this process like hand scraping, wire brushing, chiseling or sculpting is a distressing technique used to add texture and character to the wood surface. As the name implies it is done either with a band or similar saw.



Embossed

The obvious difference between embossed flooring and general flooring is that the former has uniform wood texture protruding from the board surface, and the surface is uneven and conveys a strong antique atmosphere. The general floor surface is flat and smooth, while there are bright and matte respectively; the smooth surface flows with various curved and straight wood texture, which can only be viewed and imagined by the eyes. And the embossed floor protruding wood grain, the foot feels real, touching the place to knock you awake to the view of the divine power of nature.

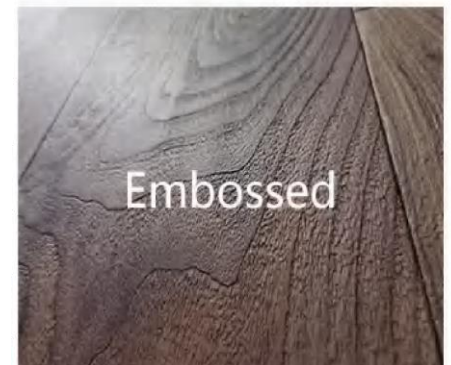



DurWood Flooring Matching Sample



And we have a strong ability to copy colors, just send us samples!



Projects



Shops







Workspace







Hotels







Restaurants





Multi-Residential





Residential





Thanks

DURFLOOR

Contact:

Phone: +966 556 006 672

Email: info@DURDOOR.COM

Website: www.durdoor.com