






DUREFLEX


ESD VINYL CATALOG




FC3226

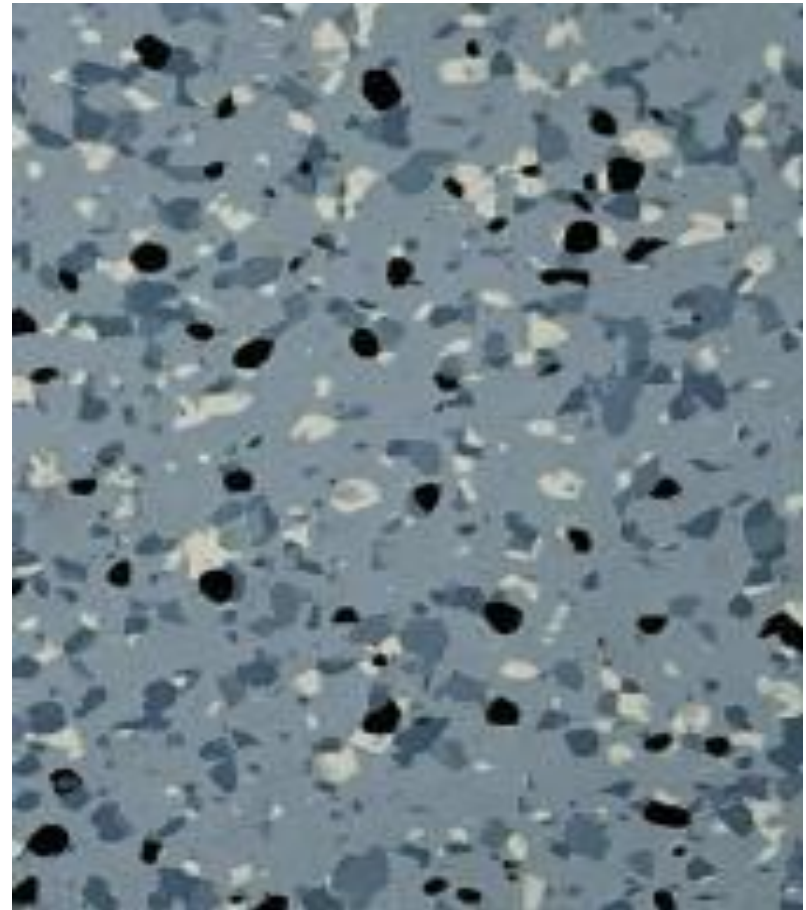


FC3254

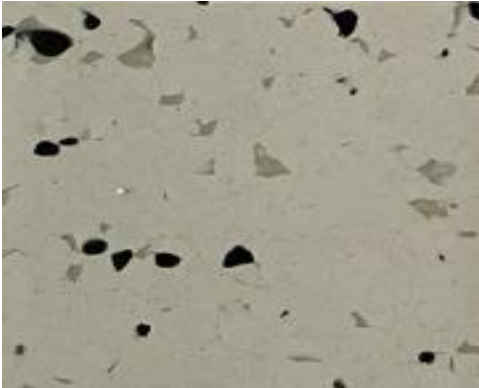


FC3219

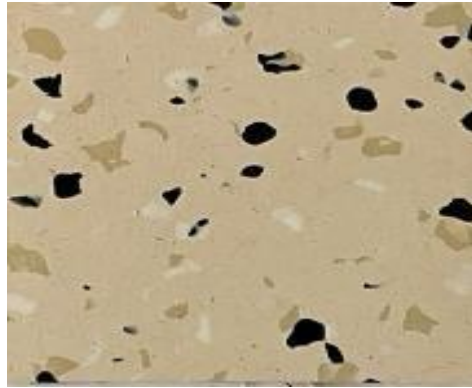


FC3222

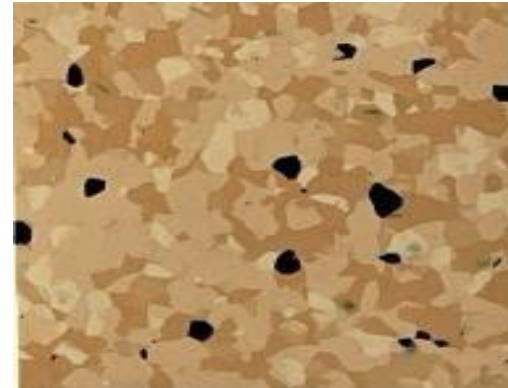

FC3212

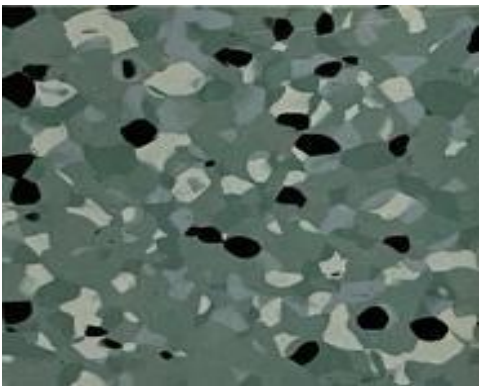


FC3220

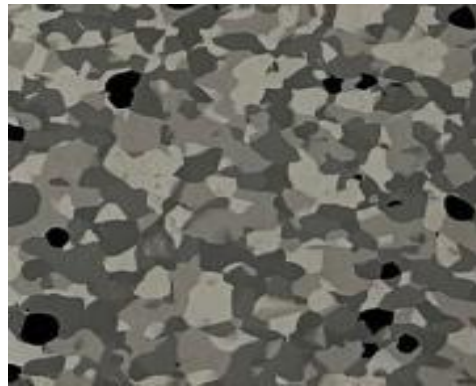


FC3226-2




FC3254-2

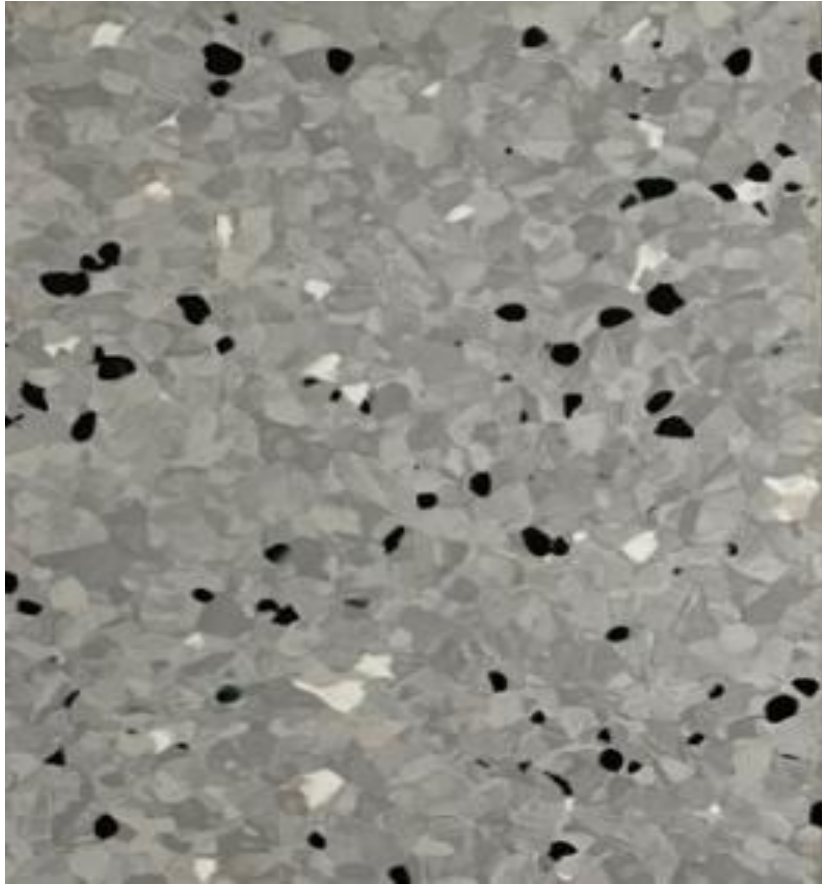


FC6056

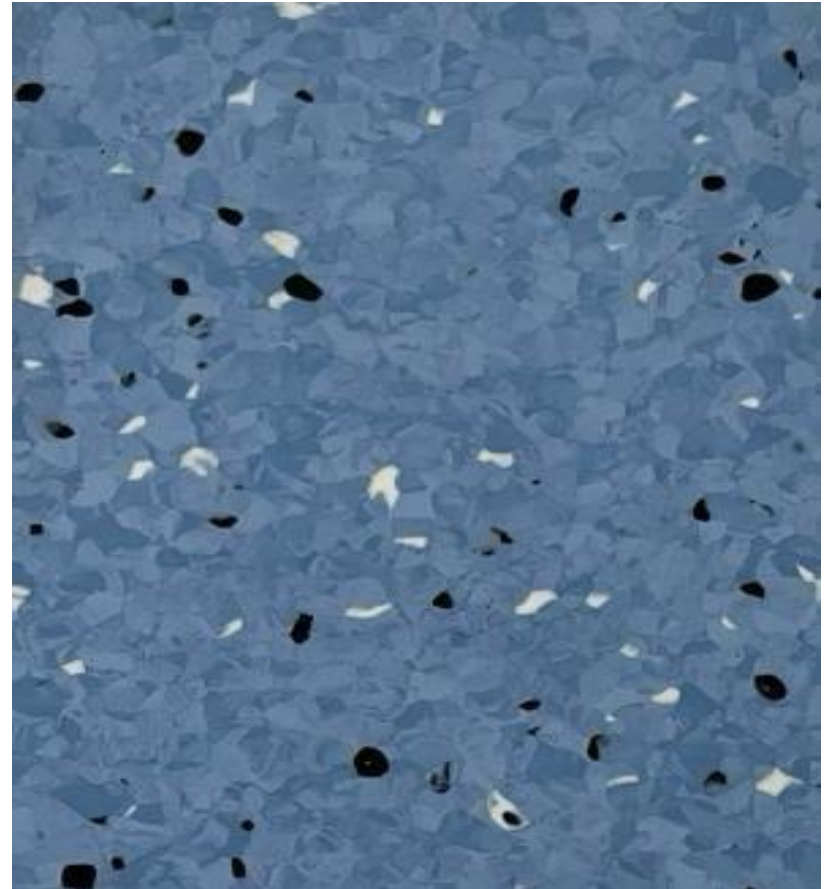


FC6096

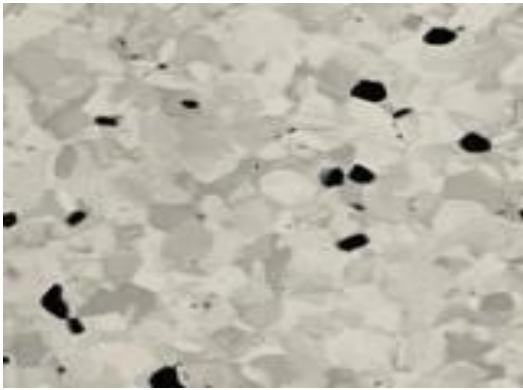


FC3278

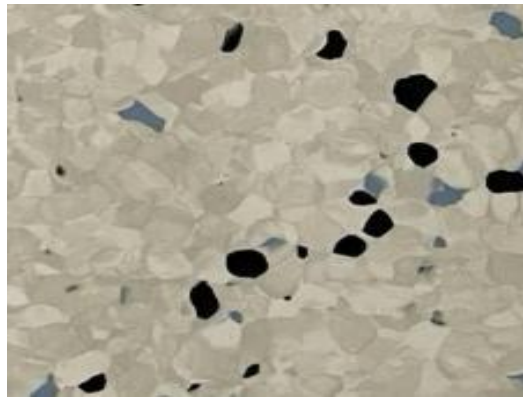


FC6036

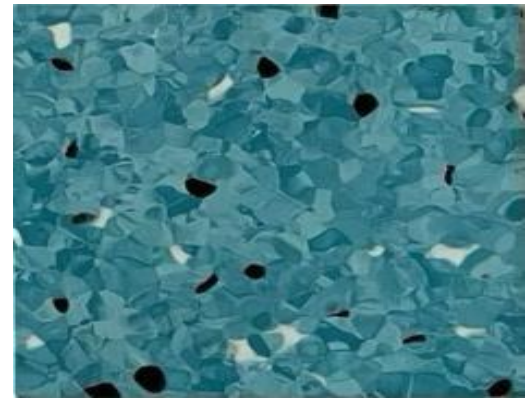


FC6116

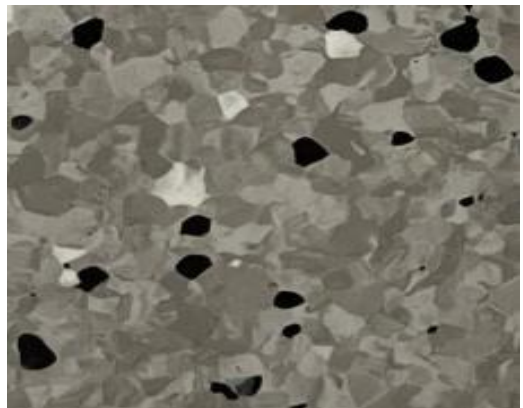

FC6076

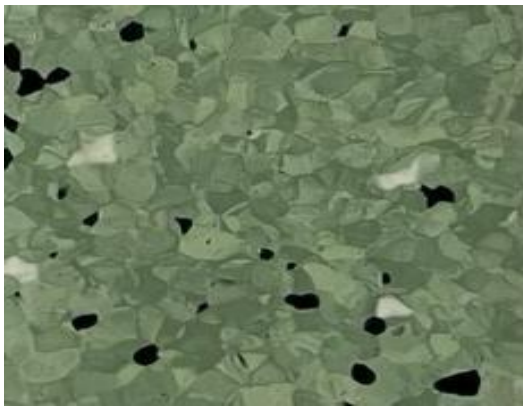

FC6106

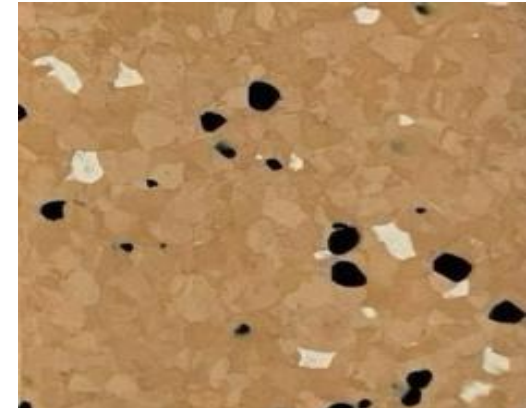

FC6046



TECHNICAL DATA

Test items	Standard	Result
Thickness	ISO24346-EN430	2.0/3.0mm
Width	GB24341-EN426SJ/T11236-20	2m
Length	GB24341-EN426SJ/T11236-20	20m
Electrical resistance	DIN51953	Static dissipative $1.0 \times 10^6 \sim 1.0 \times 10^9 \Omega$
	SJ/T11236-2001	Conductive $< 1.0 \times 10^6 \Omega$
Decay period of static voltage	SJ/T10694-2006	$\leq 2S$
Strating voltage	SJ/T11236-2001	IVI < 100V
Amount of wear	SJ/T11236-2001	$\leq 0.02g/cm^3$
Combusion property	GB8624-2006	Bf1-S1,T1
	SJ/T11236-2001	FV-0



Test items	Standard	Result
Smoke toxicity	GB8624-2006	ZA3
Smoke production	GB8624-2006	≤750%,min
Anti-bacterial	ISO22196	Anti-bacterial rate I
Slip resistance	DIN51130	R9
Toxic testing	GB18586-2001	Suitable
Formaldehyde emission	EN717-1	Without N.D
Residual indentation	EN433	≤0.10mm
Effect of castor chair	EN425	No delamination no cracks
Dimensional stability	EN434	≤0.40%
Color fastness	ENISO 105 B02	≥6
Impact sound absorption vli	ENISO 0717/2	Apprpx 2dB
Resistance to staining	EN423:2001	0,Not affected

Thanks

DURDOOR

Contact:

Phone: +966 556 006 672

Email: info@DURDOOR.COM

Website: www.durdoor.com